


Gas-fired wall-mounted condensing boiler
Standard heating boiler 25 to 230 MBH
Combi heating boiler 25 to 91 MBH
Multi-boiler installation 344 to 920 MBH

VIESSMANN

VITODENS 200

Innovative. Highest efficiency. Reliable.

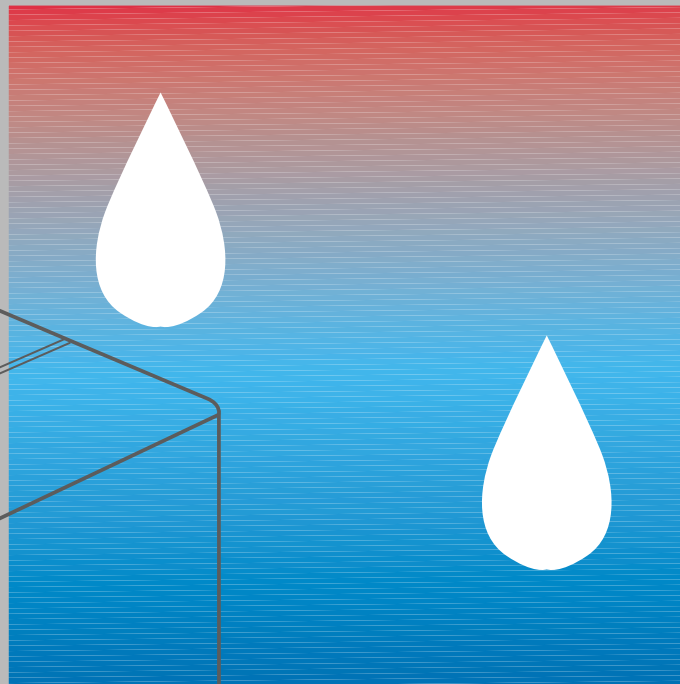

VITODENS 200

Maximize fuel efficiency and minimize your annual heating cost! This high-tech wall-mounted condensing boiler is economical, extremely reliable and compact – and it's unparalleled in the heating industry. Here is why...

The benefits at a glance:

- **Highest efficiency with full modulation up to 98%.**

A.F.U.E.: up to 95.2%.

- **Maximum reliability**

High-alloy stainless steel (SA240 316 Ti) Inox-Radial heat exchanger constructed in compliance with CSA B51 and ASME Section IV. Max. pressure rating: 45 psig.

- **Protect the environment**

Extremely low emissions with modulating MatriX-compact gas burner.

NO_x: 8.9 ppm (air-free)
CO: 5.5 ppm (air-free)

- **Compact, lightweight design.**

Zero clearance to combustibles. Limited space is not an issue.

- **Clean, esthetically pleasing**

appearance for installation anywhere in your living area.

- **Extremely quiet operation;** quieter than most refrigerators.

- **Smart burner technology**


Factory calibrated, self-adjusting burner. **No adjusting in the field, reduced operating cost.**

- **Powerful and user-friendly outdoor**

reset control, built-in and prewired with diagnostic system. Controls multi-temperature space heating and DHW systems.

- **Reliable DHW production two ways:**

- Combi model features an integrated DHW Quick System. No DHW tank required.
- Unlimited DHW supply with a stand-alone DHW tank with any other Vitodens 200.



Inox-Radial heat exchanger surface



MatriX-compact gas burner




Powerful and user-friendly control



VIESSMANN

Viessmann Manufacturing Company Inc.
750 McMurray Road
Waterloo, ON N2V 2G5 • Canada
Tel.: (519) 885-6300 Fax: (519) 885-0887
www.viessmann.ca

Viessmann Manufacturing Company (U.S.) Inc.
45 Access Road
Warwick, RI 02886 • U.S.A.
Tel.: (401) 732-0667 Fax: (401) 732-0590
www.viessmann-us.com



- **Three different venting options:**

- Horizontal or vertical sealed combustion vent system (factory supplied)
- Vertical single-wall vent system (field supplied)

- **Multi-boiler installation**

Models WB2-44 and -60 can be combined to a maximum of 4. **Ideal for light commercial applications.**

- **One version for all elevation**


levels (0 – 10 000 ft. / 0 – 3048 m).

- **Fast, simple conversions to**

natural or propane gas.



Vitodens 200 Boiler Efficiency

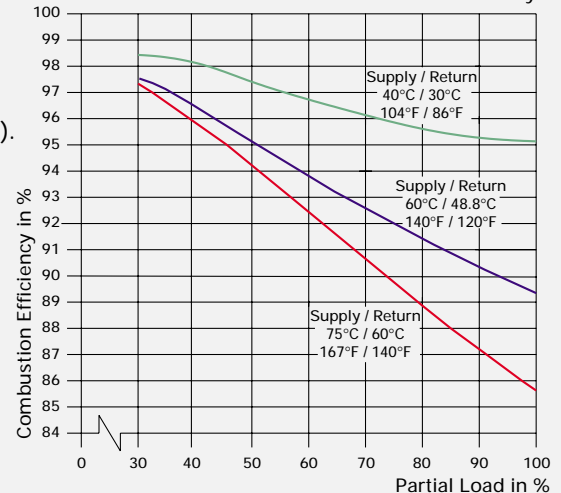

VITODENS 200	WB2	6-24C	6-24	8-32	11-44	15-60
Rated input range (NG)	MBH	25-91	25-91	37-124	55-172	80-230
Rated input range (LP)	MBH	25-81	25-81	37-112	55-155	80-214
Depth	inches	16	16	16	21¼	21¼
Width	inches	19¼	19¼	19¼	23½	23½
Height	inches	35½	35½	35½	35½	35½

Technical information subject to change without notice.