


Atmospheric gas-fired hot water heating boiler
Rated input: 65 to 200 MBH

VIESSMANN

VITOGAS 050

*Gas-fired hot water heating boiler
in an economical and compact design*

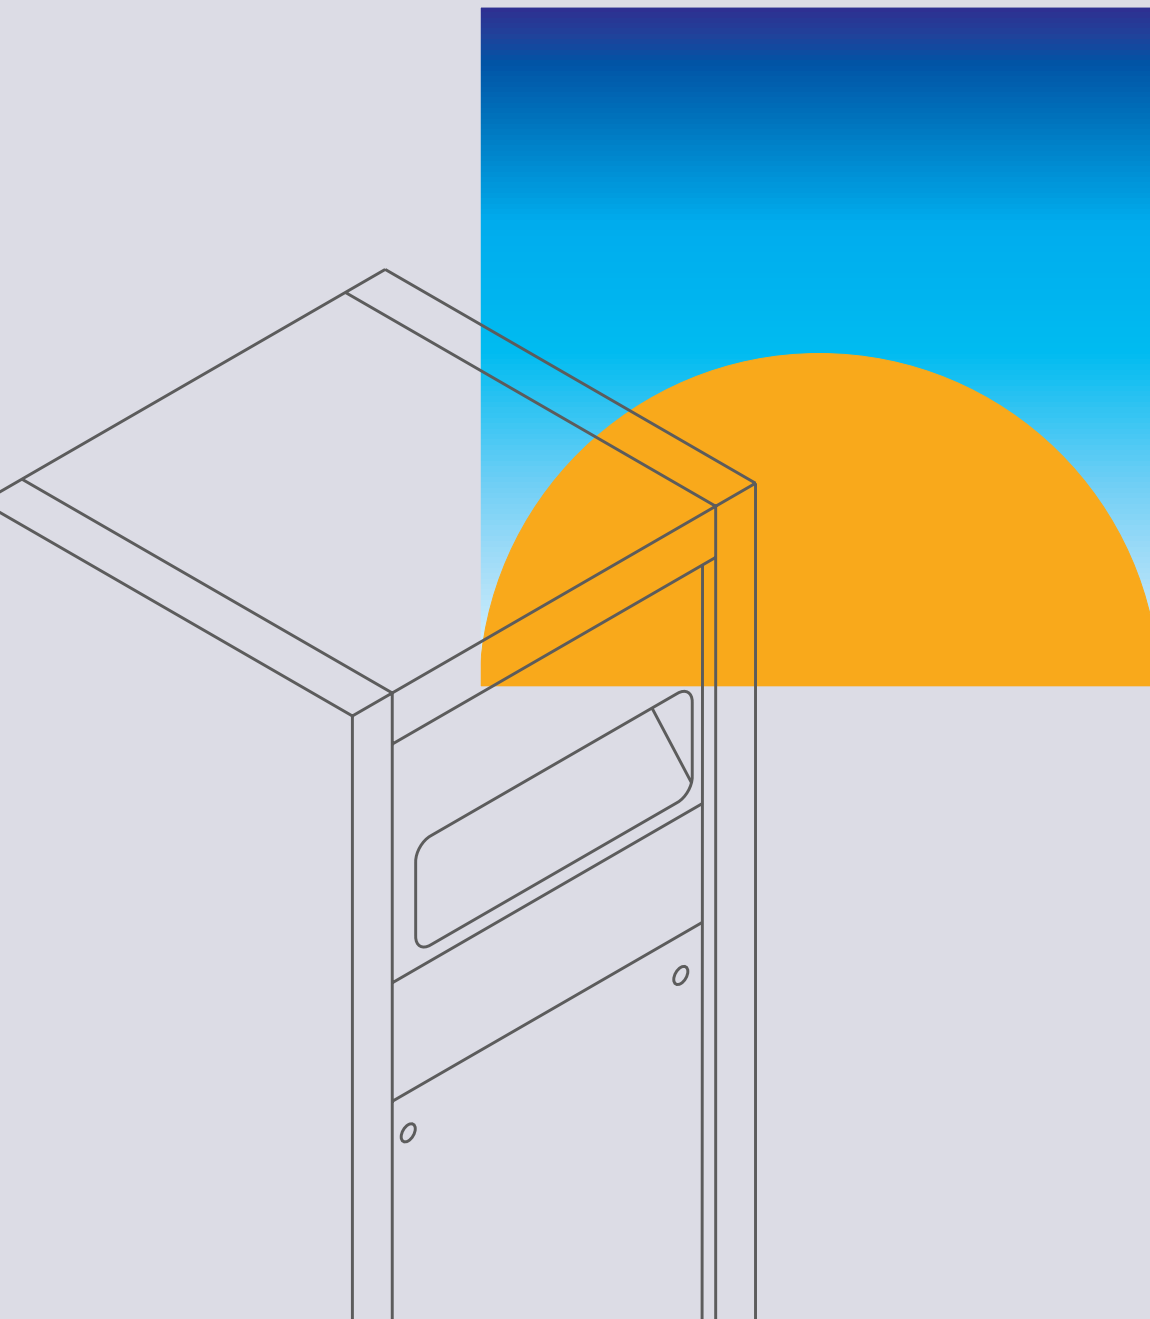

VITOGAS 050

With gray cast iron heat exchanger surface


Atmospheric gas-fired hot water heating boiler

Rated input: 65 to 200 MBH



Viessmann Manufacturing Company Inc.
750 McMurray Road
Waterloo, ON - N2V 2G5 • Canada
Tel.: (519) 885-6300 Fax: (519) 885-0887
www.viessmann.ca

Viessmann Manufacturing Company (U.S.) Inc.
45 Access Road
Warwick, RI • 02886 • U.S.A.
Tel.: (401) 732-0667 Fax: (401) 732-0590
www.viessmann-us.com



Impressive performance in an economical and compact design. The Vitogas 050, EC Series feature space-saving construction, allowing for closet installation with minimal clearances.



Special gray cast iron heat exchanger surface

The benefits at a glance:

- **High operational reliability and a long service life** thanks to the high-quality, gray cast iron heat exchanger.
- **Efficient combustion and quiet operation** with large diameter, stainless steel burners.
- **AFUE: up to 83.7%.**
- **Two venting options:** the ECD, with a motorized vent damper for chimney venting and the ECV, with a built-in power venter for direct venting through an outside wall with a single-wall, stainless steel vent pipe system.
- **Problem-free transport** into difficult-to-access boiler rooms due to light weight and compact design.



Vitogas 050, ECD – for chimney venting

Vitogas 050, ECV – for direct venting

VITOGAS 050		Model	ECD-	65	80	100	115	140	155	180	200
Rated input			MBH	65	80	100	115	140	155	180	200
Total dimensions	Depth	inches	19¾	19¾	19¾	19¾	19¾	19¾	19¾	19¾	19¾
	Width	inches	13½	13½	17	17	21	21	25	25	
	Height	inches	40¾	40¾	40¾	40¾	40¾	40¾	40¾	40¾	40¾
Weight (incl. insulation, burners and packaging)			lbs	233	233	285	285	345	345	423	423
Boiler water content			USG	2.6	2.6	3.5	3.5	4.3	4.3	7.1	7.1

VITOGAS 050		Model	ECV-	65	80	100	115	140	155	180	200
Rated input			MBH	65	80	100	115	140	155	180	200
Total dimensions	Depth	inches	19¾	19¾	19¾	19¾	19¾	19¾	19¾	19¾	19¾
	Width	inches	13½	13½	17	17	21	21	25	25	
	Height	inches	39½	39½	39½	39½	39½	39½	39½	39½	39½
Weight (incl. insulation, burners and packaging)			lbs	243	243	293	293	364	364	430	430
Boiler water content			USG	2.6	2.6	3.5	3.5	4.3	4.3	7.1	7.1



Technical information subject to change without notice.