



MULTI-SPLIT AIR CONDITIONERS

INDOOR UNITS



CHAOS SWING NATURAL AIR FLOW SYSTEM




OUTDOOR UNIT

INDOOR UNITS



TRIPLE FILTER AIR PURIFYING SYSTEM

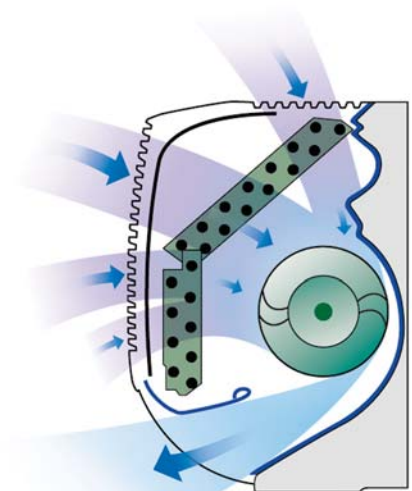

OUTDOOR UNIT

ULTRA-QUIET STREAMLINED AIR FAN

MULTI-SPLIT



18,000 BTUs

LM-1830C2L (A/C Model)

C 9,000 + 9,000 BTUs **Cooling**

LM-1830H2L (H/P Model)

C 9,000 + 9,000 BTUs **Cooling**

H 9,000 + 9,000 BTUs **Heating**

Electrical	LM-1830C2L	LM-1830H2L
SEER	10	10
Rated Voltage/PH/Hz	208/230 -1- 60	208/230 -1- 60
Rated Watts Cooling	1,680	1,680
Heating	—	1,680
Rated Amps Cooling	8.2	8.2
Heating	—	8.2
Indoor Power Supply (V)	36	36
Air Circulation (Rated CFM)	250*	250*
Fan Speeds (Cool/Heat)	3	3/3
Indoor Dimensions		
W x H x D (inches)	31 19/32 x 10 5/16 x 6 1/2	31 19/32x 10 5/16 x 6 1/2
Weight (lbs.)	15.4	15.4
Outdoor Dimensions		
W x H x D (inches)	34 5/16 x 25 13/16 x 12 19/32	34 5/16 x 25 13/16 x 12 19/32
Weight (lbs.)	139	139
Container Loading		
STD 40 FT (Set)	132	132
Thermostat Range		
Cooling / Heating (°F)	64-86	64-86 /60-86

*per indoor unit

Standard Features:

- Chaos Swing
- Jet Cool
- Cooling mode
- Heating mode (H/P Model only)
- Dehumidifying mode
- Fan mode
- Evaporator frost control
- Defrost control (H/P model only)
- Auto sleep mode
- 24-Hour ON/OFF timer
- Auto restart
- Auto operation
- Triple-filter air purifying system
- Remote control
- Ultra-quiet operation

Evaporator Unit Includes:

- 2 Evaporator units
- 2 Evaporator unit installation plates & hardware
- 2 Remote controls
- Remote control batteries, 2 holders & holder hardware
- Installation manual

Condenser Unit Includes:

- Condenser unit
- Condenser unit has sufficient refrigerant for charging 2 indoor coils and 25' of line per indoor unit
- Owner's manual

24,000 BTUs

LM-2430C2L (A/C Model)

C 12,000 + 12,000 BTUs **Cooling**

LM-2430H2L (H/P Model)

C 12,000 + 12,000 BTUs **Cooling**

H 12,000 + 12,000 BTUs **Heating**



Standard Features:

- Chaos Swing
- Jet Cool
- Cooling mode
- Heating mode (H/P Model only)
- Dehumidifying mode
- Fan mode
- Evaporator frost control
- Defrost control (H/P model only)
- Auto sleep mode
- 24-Hour ON/OFF timer
- Auto restart
- Auto operation
- Triple-filter air purifying system
- Remote control
- Ultra-quiet operation

Evaporator

Unit Includes:

- 2 Evaporator units
- 2 Evaporator unit installation plates & hardware
- 2 Remote controls
- Remote control batteries, 2 holders & holder hardware
- Installation manual

Condenser

Unit Includes:

- Condenser unit
- Condenser unit has sufficient refrigerant for charging 2 indoor coils and 25' of line per indoor unit
- Owner's manual

Electrical

	LM-2430C2L	LM-2430H2L
SEER	10	10
Rated Voltage/PH/Hz	208/230 -1- 60	208/230 -1- 60
Rated Watts Cooling	2,400	2,400
Heating	—	2,400
Rated Amps Cooling	11.0	14.0
Heating	—	13.5
Indoor Power Supply (V)	36	36
Air Circulation (Rated CFM)	280*	280*
Fan Speeds (Cool/Heat)	3	3/3

Indoor Dimensions

W x H x D (inches)	LM-2430C2L	LM-2430H2L
	35 x 11 5/16 x 6 11/16	35 x 11 5/16 x 6 11/16
Weight (lbs.)	20.9	20.9

Outdoor Dimensions

W x H x D (inches)	LM-2430C2L	LM-2430H2L
	34 5/16 x 25 13/16 x 12 19/32	34 5/16 x 25 13/16 x 12 19/32
Weight (lbs.)	139	139

Container Loading

STD 40 FT (Set)	LM-2430C2L	LM-2430H2L
	132	132

Thermostat Range

Cooling / Heating (°F)	LM-2430C2L	LM-2430H2L
	64-86	64-86 /60-86

*per indoor unit

36,000 BTUs



C **LM360CE** (A/C Model)
12,000 + 12,000 + 12,000 BTUs **Cooling**

C **LM360HE** (H/P Model)
12,000 + 12,000 + 12,000 BTUs **Cooling**
H 12,000 + 12,000 + 12,000 BTUs **Heating**

Electrical	LM360CE	LM360HE
SEER	12	12
Rated Voltage/PH/Hz	208/230 -1- 60	208/230 -1- 60
Rated Watts Cooling	4,020	4,020
Heating	—	4,020
Rated Amps Cooling	17.9	17.5
Heating	—	17.5
Indoor Power Supply (V)	36	36
Air Circulation (Rated CFM)	283*	283*
Fan Speeds (Cool/Heat)	3	3/3
Indoor Dimensions		
W x H x D (inches)	35 x 11 5/16 x 6 11/16	35 x 11 5/16 x 6 11/16
Weight (lbs.)	19.8	19.8
Outdoor Dimensions		
W x H x D (inches)	34 3/16 x 41 11/16 x 12 19/32	34 3/16 x 41 11/16 x 12 19/32
Weight (lbs.)	78	78
Container Loading		
STD 40 FT (Set)	74	74
Thermostat Range		
Cooling / Heating (°F)	64-86	64-86 /60-86
*per indoor unit		

Standard Features:

- Multi Power System™
- Chaos Swing
- Jet Cool
- Cooling mode
- Heating mode (H/P Model only)
- Dehumidifying mode
- Fan mode
- Evaporator frost control
- Defrost control (H/P model only)
- Auto sleep mode
- 24-Hour ON/OFF timer
- Auto restart
- Auto operation
- Triple-filter air purifying system
- Remote control
- Ultra-quiet operation

Evaporator Unit Includes:

- 3 Evaporator units
- 3 Evaporator unit installation plates & hardware
- 3 Remote controls
- Remote control batteries, 3 holders & holder hardware
- Installation manual

Condenser Unit Includes:

- Condenser unit
- Condenser unit has sufficient refrigerant for charging 3 indoor coils and 25' of line per indoor unit
- Owner's manual