



SINGLE-SPLIT AIR CONDITIONERS

INDOOR UNIT




OUTDOOR UNIT



CHAOS SWING NATURAL
AIR FLOW SYSTEM



TRIPLE FILTER
AIR PURIFYING SYSTEM

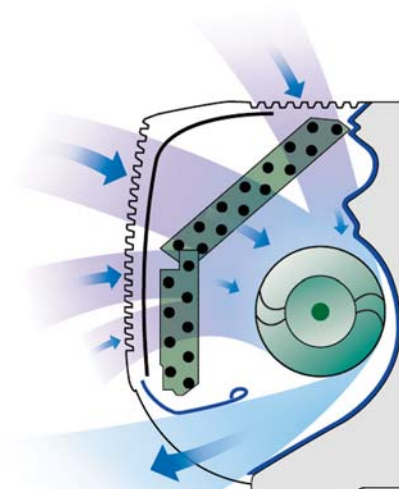

ULTRA-QUIET
STREAMLINED AIR FAN

9,000 BTUs



LS-J0910CL (A/C Model)

C 9,000 BTUs **Cooling**

LS-J0910HL (H/P Model)

C 9,000 BTUs **Cooling**

H 9,000 BTUs **Heating**

Electrical	LS-J0910CL	LS-J0910HL
SEER	10	10
Rated Voltage/PH/Hz	115 -1- 60	115 -1- 60
Rated Watts Cooling		900
Rated Watts Heating	—	900
Rated Amps Cooling	8.5	8
Rated Amps Heating	—	8
Indoor Power Supply (Volts)	36	36
Air Circulation (Rated CFM)	250	250
Fan Speeds (Cool/Heat)	3	3/3
Indoor Dimensions		
W x H x D (inches)	31 19/32 x 10 5/16 x 6 1/2	31 19/32 x 10 5/16 x 6 1/2
Weight (lbs.)	15.4	15.4
Outdoor Dimensions		
W x H x D (inches)	30 5/16 x 21 5/16 x 9 19/32	30 5/16 x 21 5/16 x 9 19/32
Weight (lbs.)	70.5	72.8
Container Loading		
STD 40 FT (Set)	198	198
Thermostat Range		
Cooling / Heating (°F)	64-86	64-86/60-86

Standard Features:

- Chaos Swing
- Jet Cool
- Cooling mode
- Heating mode (H/P model only)
- Dehumidifying mode
- Fan mode
- Evaporator frost control
- Defrost control (H/P model only)
- Auto sleep mode
- 24-Hour ON/OFF timer
- Auto restart
- Auto operation
- Triple-filter air purifying system
- Remote control
- Ultra-quiet operation

Evaporator Unit Includes:

- Evaporator unit
- Evaporator unit installation plate & hardware
- Remote control
- Remote control batteries, holder & holder hardware
- Installation manual

Condenser Unit Includes:

- Condenser unit
- Condenser unit has sufficient refrigerant for charging indoor coil and 25' of line
- Owner's manual

12,000 BTUs

LS-L1210CL (A/C Model)
C 12,000 BTUs **Cooling**

LS-L1210HL (H/P Model)
C 12,000 BTUs **Cooling**

H 12,000 BTUs **Heating**



Standard Features:

- Chaos Swing
- Jet Cool
- Cooling mode
- Heating mode (H/P model only)
- Dehumidifying mode
- Fan mode
- Evaporator frost control
- Defrost control (H/P model only)
- Auto sleep mode
- 24-Hour ON/OFF timer
- Auto restart
- Auto operation
- Triple-filter air purifying system
- Remote control
- Ultra-quiet operation

Evaporator

Unit Includes:

- Evaporator unit
- Evaporator unit installation plate & hardware
- Remote control
- Remote control batteries, holder & holder hardware
- Installation manual

Condenser

Unit Includes:

- Condenser unit
- Condenser unit has sufficient refrigerant for charging indoor coil and 25' of line
- Owner's manual

Electrical

	LS-L1210CL	LS-L1210HL
SEER	10	10
Rated Voltage/PH/Hz	115 -1- 60	115 -1- 60
Rated Watts Cooling	1,290	1,290
Rated Watts Heating	—	1,290
Rated Amps Cooling	11.7	11.7
Rated Amps Heating	—	11.7
Indoor Power Supply (Volts)	36	36
Air Circulation (Rated CFM)	330	330
Fan Speeds (Cool/Heat)	3	3/3

Indoor Dimensions

	LS-L1210CL	LS-L1210HL
W x H x D (inches)	35 x 11 5/16 x 6 11/16	35 x 11 5/16 x 6 11/16
Weight (lbs.)	20.9	20.9

Outdoor Dimensions

	LS-L1210CL	LS-L1210HL
W x H x D (inches)	30 5/16 x 21 5/16 x 9 19/32	30 5/16 x 21 5/16 x 9 19/32
Weight (lbs.)	70.5	72.8

Container Loading

	LS-L1210CL	LS-L1210HL
STD 40 FT (Set)	196	196

Thermostat Range

	LS-L1210CL	LS-L1210HL
Cooling / Heating (°F)	64-86	64-86/60-86

18,000 BTUs

LS-K1830CL (A/C Model)

C 18,000 BTUs **Cooling**

LS-K1830HL (H/P Model)

C 18,000 BTUs **Cooling**

H 18,000 BTUs **Heating**



Electrical	LS-K1830CL	LS-K1830HL
SEER	10	10
Rated Voltage/PH/Hz	208/230 -1- 60	208/230 -1- 60
Rated Watts Cooling	1,900	1,900
Rated Watts Heating	—	1,900
Rated Amps Cooling	9.0	8.5
Rated Amps Heating	—	8.5
Indoor Power Supply (Volts)	36	36
Air Circulation (Rated CFM)	460	460
Fan Speeds (Cool/Heat)	3	3/3
Indoor Dimensions		
W x H x D (inches)	42 1/2 x 12 13/32 x 7 3/32	42 1/2 x 12 13/32 x 7 3/32
Weight (lbs.)	28.7	28.7
Outdoor Dimensions		
W x H x D (inches)	34 5/16 x 25 13/16 x 12 19/32	34 5/16 x 25 13/16 x 12 19/32
Weight (lbs.)	134.5	136.7
Container Loading		
STD 40 FT (Set)	132	132
Thermostat Range		
Cooling / Heating (°F)	64-86	64-86/60-86

Standard Features:

- Chaos Swing
- Jet Cool
- Cooling mode
- Heating mode (H/P model only)
- Dehumidifying mode
- Fan mode
- Evaporator frost control
- Defrost control (H/P model only)
- Auto sleep mode
- 24-Hour ON/OFF timer
- Auto restart
- Auto operation
- Triple-filter air purifying system
- Remote control
- Ultra-quiet operation

Evaporator Unit Includes:

- Evaporator unit
- Evaporator unit installation plate & hardware
- Remote control
- Remote control batteries, holder & holder hardware
- Installation manual

Condenser Unit Includes:

- Condenser unit
- Condenser unit has sufficient refrigerant for charging indoor coil and 25' of line
- Owner's manual

24,000 BTUs

LS-K2430CL (A/C Model)

C 23,000 BTUs **Cooling**

LS-K2430HL (H/P Model)

C 23,000 BTUs **Cooling**

H 23,000 BTUs **Heating**



Standard Features:

- Chaos Swing
- Jet Cool
- Cooling mode
- Heating mode (H/P model only)
- Dehumidifying mode
- Fan mode
- Evaporator frost control
- Defrost control (H/P model only)
- Auto sleep mode
- 24-Hour ON/OFF timer
- Auto restart
- Auto operation
- Triple-filter air purifying system
- Remote control
- Ultra-quiet operation

Evaporator

Unit Includes:

- Evaporator unit
- Evaporator unit installation plate & hardware
- Remote control
- Remote control batteries, holder & holder hardware
- Installation manual

Condenser

Unit Includes:

- Condenser unit
- Condenser unit has sufficient refrigerant for charging indoor coil and 25' of line
- Owner's manual

Electrical

	LS-K2430CL	LS-K2430HL
SEER	10	10
Rated Voltage/PH/Hz	208/230 -1- 60	208/230 -1- 60
Rated Watts Cooling	2,550	2,550
Rated Watts Heating	—	2,550
Rated Amps Cooling	12.0	11.5
Rated Amps Heating	—	11.5
Indoor Power Supply (Volts)	36	36
Air Circulation (Rated CFM)	530	530
Fan Speeds (Cool/Heat)	3	3/3

Indoor Dimensions

	LS-K2430CL	LS-K2430HL
W x H x D (inches)	42 1/2 x 12 13/32 x 7 3/32	42 1/2 x 12 13/32 x 7 3/32
Weight (lbs.)	28.7	28.7

Outdoor Dimensions

	LS-K2430CL	LS-K2430HL
W x H x D (inches)	34 5/16 x 25 13/16 x 12 19/32	34 5/16 x 25 13/16 x 12 19/32
Weight (lbs.)	136.7	138.9

Container Loading

	LS-K2430CL	LS-K2430HL
STD 40 FT (Set)	132	132

Thermostat Range

	LS-K2430CL	LS-K2430HL
Cooling / Heating (°F)	64-86	64-86/60-86

30,000 BTUs



LS300CE (A/C Model)

C 28,000 BTUs **Cooling**

LS301HE (H/P Model)

C 28,000 BTUs **Cooling**

H 29,000 BTUs **Heating**

Electrical	LS300CE	LS301HE
SEER	10.5	10.5
Rated Voltage/PH/Hz	208/230 -1- 60	208/230 -1- 60
Rated Watts Cooling	3,600	3,600
Heating	—	3,750
Rated Amps Cooling	16.5	16.0
Heating	—	16.5
Indoor Power Supply (V)	220	220
Air Circulation (Rated CFM)	740	740
Fan Speeds (Cool/Heat)	3	3/3
Indoor Dimensions		
W x H x D (inches)	49 1/2 x 12 13/32 x 13 11/16	49 1/2 x 12 13/32 x 13 11/16
Weight (lbs.)	46.6	46.6
Outdoor Dimensions		
W x H x D (inches)	34 5/16 x 31 1/2 x 12 19/32	34 5/16 x 31 1/2 x 12 19/32
Weight (lbs.)	166.6	166.6
Container Loading		
STD 40 FT (Set)	107	107
Thermostat Range		
Cooling / Heating (°F)	64-86	64-86 /60-86

Standard Features:

- Chaos Swing
- Jet Cool
- Cooling mode
- Heating mode (H/P model only)
- Dehumidifying mode
- Fan mode
- Evaporator frost control
- Defrost control (H/P model only)
- Auto sleep mode
- 24-Hour ON/OFF timer
- Auto restart
- Auto operation
- Triple-filter air purifying system
- Remote control
- Ultra-quiet operation

Evaporator Unit Includes:

- Evaporator unit
- Evaporator unit installation plate & hardware
- Remote control
- Remote control batteries, holder & holder hardware
- Installation manual

Condenser Unit Includes:

- Condenser unit
- Condenser unit has sufficient refrigerant for charging indoor coil and 25' of line
- Owner's manual